

MOTOMAN MPP3H

Handling, Picking & Packing
with the MPP-series





The MOTOMAN MPP3H 4-axis high-speed robot with parallel kinematic system combines the speed of the delta design with a high payload capacity and a large working range. Due to the high torque of the fourth axis, the so-called wrist axis, the MOTOMAN MPP3H moves payloads of up to 3 kg at unprecedented speeds. This delta robot was developed for a wide spectrum of industries, such as food and beverage, pharmaceutical and the automotive sector.

The MPP3H is driven by Yaskawas compact FS100 controller and is available with advanced technologies such as MotoSight, MotoPick and conveyor tracking.

KEY BENEFITS

- Protection classification IP67
- Cleanroom class ISO 5 (with 50 and 100 % speed)
- Payloads with unprecedented speed:
 - 150 cycles per minute with 3 kg payload
 - 185 cycles per minute with 1 kg payload
- Total stroke of 500 mm with a working range of 1300 mm
- High-precision, high-speed conveyor tracking
- Maximum machine accuracy
- Compact installation space: 684 mm diameter

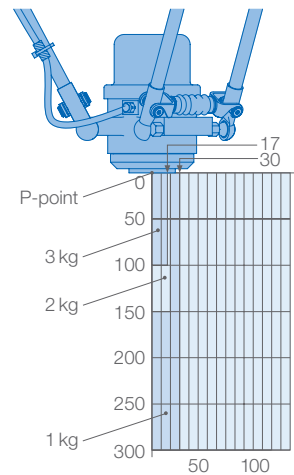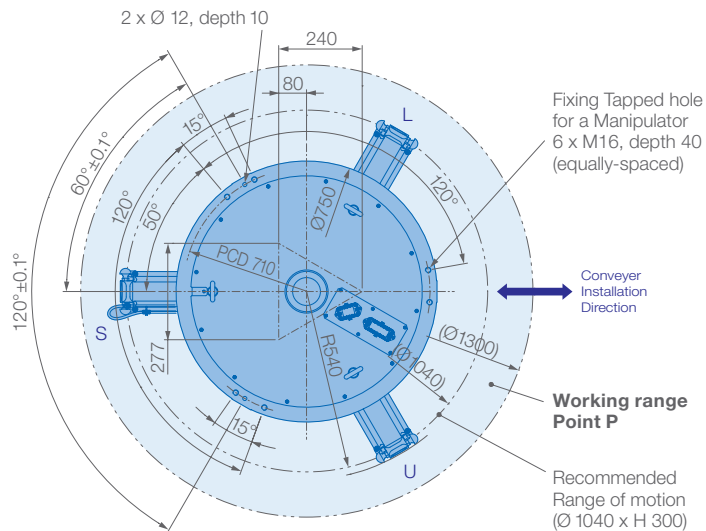

**TÜV
CERT**
EN ISO 9001
Zertifikat Nr. 20 100 9864
www.tuv.at

Specifications MPP3H						
Plattern	Payload [kg]	CPM *	Payload [kg]	CPM *	Controlled axes	4
					Max. payload [kg]	3
25-305-25	1	230	3	170	Repeat. pos. accuracy [mm]	±0.1
300-400-100	1	100	3	80	Repeat. rotational accuracy of T-axis [arc x min –1]	±1
70-700-70	1	130	3	95	Max. working range R [mm]	1300
	Conveyor speed ** [mm/s]		Conveyor position repeat accuracy ** [mm]		Temperature [°C]	0 to +40
					Humidity [%]	20 – 80
	800		1.0		Weight [kg]	115
	1300		1.5		Power supply, average [KVA]	1.5
	2000		3.0		IP class	IP67
					IPA cleanroom class	5.0

** Values determined under test conditions, differences possible depending on application.

YASKAWA

MOTOMAN MPP3S

Handling, Picking & Packing
with the MPP-series



The MOTOMAN MPP3S 4-axis high-speed robot with parallel kinematic system combines the speed of the delta design with a high payload capacity and a large working range. Due to the high torque of the fourth axis, the so-called wrist axis, the MOTOMAN MPP3S moves payloads of up to 3 kg at unprecedented speeds. This delta robot was developed for a wide spectrum of industries, such as food and beverage, pharmaceutical and the automotive sector.

The MPP3S is driven by Yaskawas compact FS100 controller and is available with advanced technologies such as MotoSight, MotoPick and conveyor tracking.

KEY BENEFITS

- Protection classification IP67
- ISO class 4 (with 50 % speed), clean room rated
- ISO class 5 (with 100 % speed), clean room rated
- Payloads with unprecedented speed:
 - 150 cycles per minute with 3 kg payload
 - 185 cycles per minute with 1 kg payload
- Total stroke of 300 mm with a working range of 800 mm
- High-precision, high-speed conveyor tracking
- Maximum machine accuracy
- Compact installation space: 684 mm diameter

